


THIS DRAWING AND THE INFORMATION DISCLOSED HEREIN ARE PROPRIETARY DATA OF SUNRISE ELECTRIC MOTOR CO.,LTD., AND IS TO BE IMMEDIATELY RETURNED UPON REQUEST. REPRODUCTION OF THIS DRAWING OR THE INFORMATION CONTAINED HEREIN IS PROHIBITED WITHOUT THE EXPRESSED WRITTEN APPROVAL OF SUNRISE.

REV	DESCRIPTION	DATE	APPROVE
1	RELEASE		

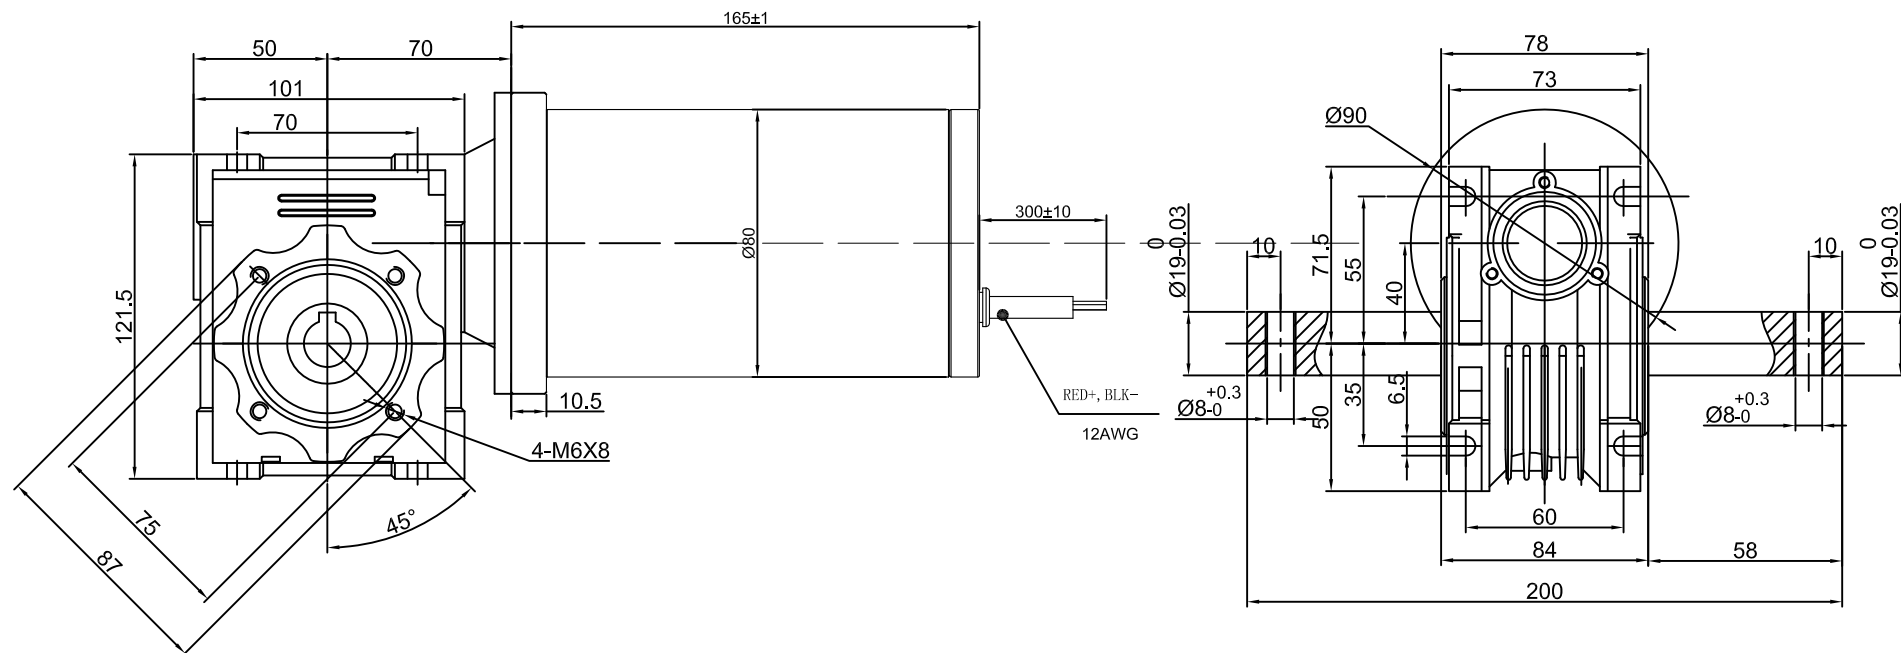

#### ELECTRICAL SPECIFICATIONS

MODEL : 80ZYT165-2438-40RV60-63B14 REV2  
 VOLTS : 24V  
 NO-LOAD SPEED: 3800±10% RPM  
 RATED POWER : 440 W  
 RATED SPEED : 3000±10% RPM  
 RATED TORQUE : 1.4 N.m  
 RATED CURRENT : <25 A  
 TYPE : TENV  
 DUTY : S1  
 PROTECTION : IP-44  
 INS.CLASS : B  
 DIRECTION : BI-DIRECTIONAL  
 GEAR RATIO : 1:60  
 RATED SPEED : 50±10% RPM  
 RATED TORQUE : 63 Nm

NOTE: THIS DRAWING HAS BEEN CREATED BY AUTOCAD. MANUAL REVISIONS ARE NOT ALLOWED.

		TOLERANCE UNLESS OTHERWISE SPECIFIED ISO 2768-1 MEDIUM			
DRAWN HG.CHEN	CHECKED F.LIU	APPROVED - DATE H.CHEN	FILENAME 80ZYT165	DATE 2020/4/16	SCALE NOT-SCALE
SUNRISE MOTOR			80ZYT165-2438-40RV60-63B14REV2		
PROJECT			SHEET 1/1		